

Introduction



WARNING! The installation of this accessory must be performed using the appropriate anti-static devices. If unavailable, discharge static from your body by touching a grounded metallic object before opening any covers on the unit.

The Pistol Grip kit, model WA6103, is intended for use with WORKABOUT PRO3 and previous G2 units (models 7527C and 7527S) which have a backplate incorporating a switch.



Figure 1-1 *Pistol Grip Kit Contents*

Installation



IMPORTANT Back up any data in RAM first, since it will be erased when the internal power of the WORKABOUT PRO3 is turned off.

1. If your unit is using AC power, disconnect it.
2. Remove the battery pack cover and battery.
3. Remove the screw-on cap, if present, from the switch in the middle of the backplate.


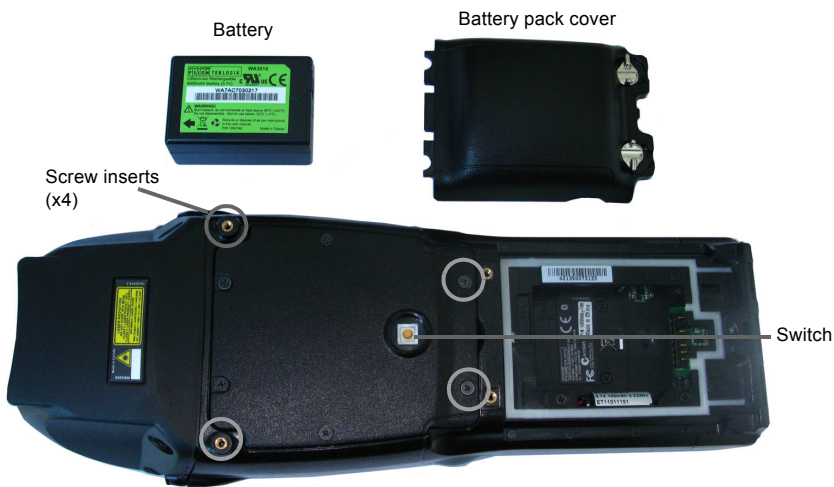


Figure 1-2 *The Switch Location on the WORKABOUT PRO3*

4. Lower the pistol grip handle into place over the backplate.



5. Fasten the four screws. Torque to 5.0 lb-in (Imperial) or 0.565 N·m (SI).

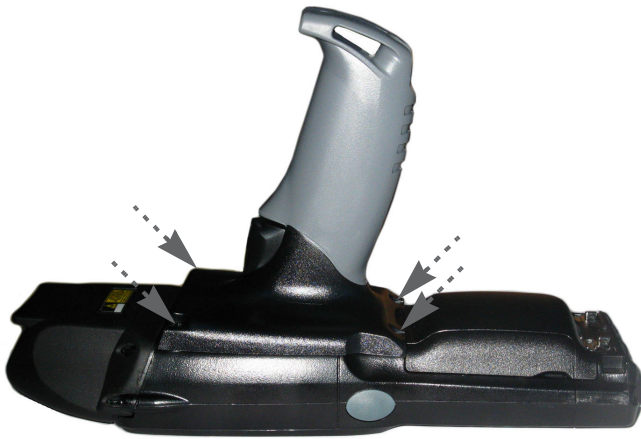

6. If your unit is using AC power, connect it.
7. Insert the battery.
8. Close the battery compartment.
9. Insert the stylus in the bottom of the pistol grip handle.

Trigger Switch Check

1. Turn the unit on.
2. Point the scanner at a bar code, and pull the pistol grip trigger switch to ensure that the scanner is scanning properly.

