



Accessory

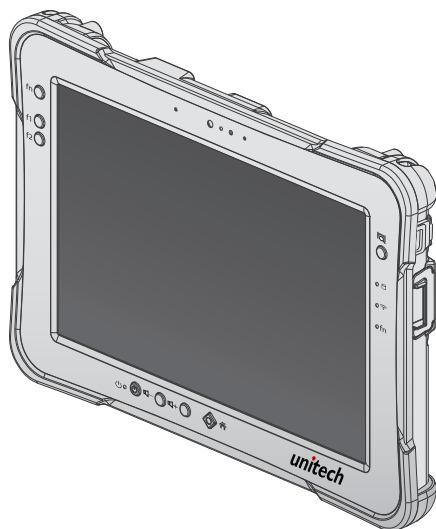


- TB160
- Power Adapter
- Stylus
- 2-Point Carrying Handle
- 4-point Handstrap
- 2-Point Shoulder Strap
- Hitch D-rings (Attaching straps)
- Regulatory Compliance Statements
- Quick start Guide
- QR code card

Overview

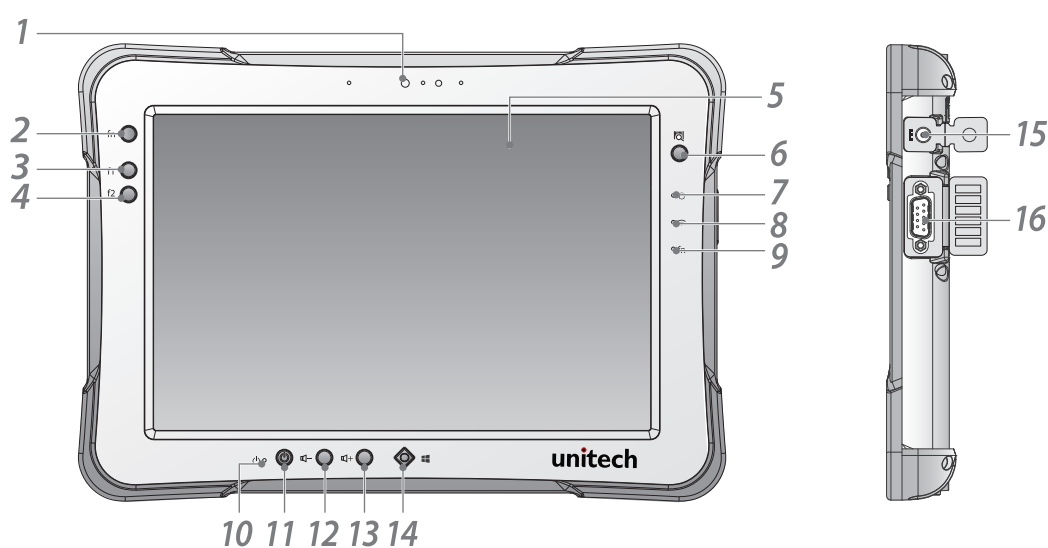

- | | |
|--------------------|----------------|
| 1. Front camera | 9. FN LED |
| 2. FN key | 10. Power LED |
| 3. F1 key | 11. Power key |
| 4. F2 key | 12. Volume - |
| 5. Touch screen | 13. Volume + |
| 6. Barcode trigger | 14. Home key |
| 7. Battery LED | 15. DC-IN jack |
| 8. Wi-Fi LED | 16. RS-232 |

Note : To prevent damage or malfunction, always dry the touch screen when wet .

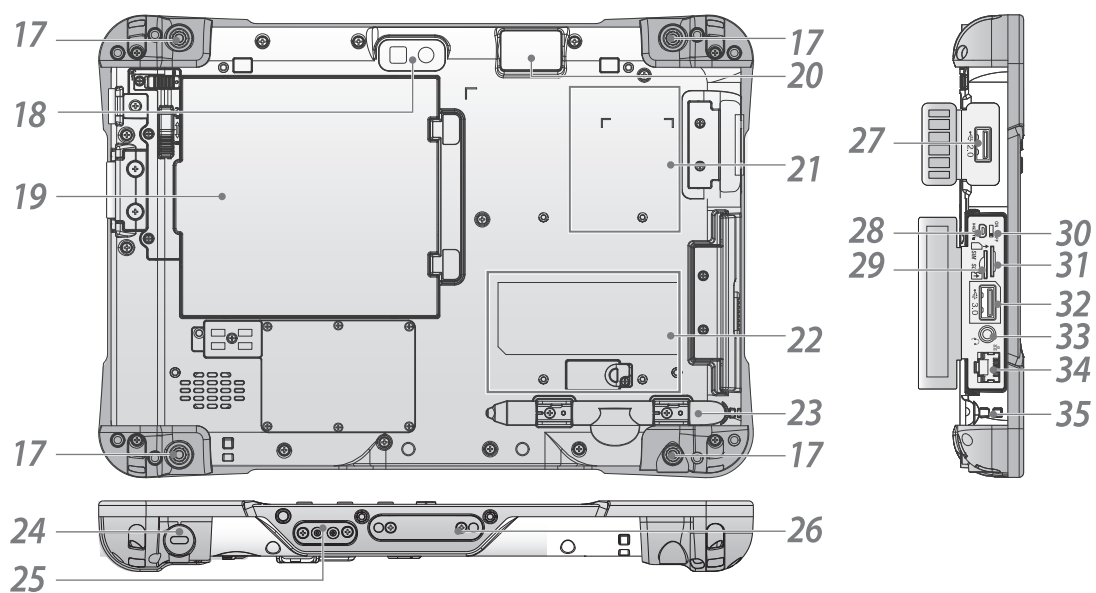


- | | |
|------------------------|--------------------|
| 17. Securing holes | 27. USB 2.0 |
| 18. Rear camera | 28. Micro-HDMI |
| 19. Battery | 29. MicroSD slot |
| 20. Barcode reader | 30. Battery Switch |
| 21. NFC sensing area * | 31. Micro SIM slot |
| 22. Expansion bay | 32. USB 3.0 |
| 23. Stylus holder | 33. Audio jack |
| 24. Kensington lock | 34. Ethernet |
| 25. Pass-through | 35. Tether hole |
| 26. Docking connector | |


* : Optional accessory

For more detailed tablet computer setting, please go to www.ute.com to download the user manual and the configuration manager utility.

Charging

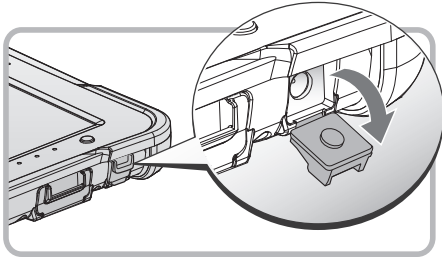


1. Flip open the DC-IN cover to expose the DC-IN jack.
2. Connect the AC adapter to the DC-IN port.

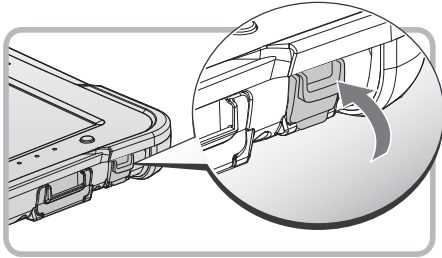


3. After charging, disconnect the AC adapter.
4. Replace the DC-IN cover by angling the rear side at an angle.
5. Press the front open end down in the compartment to seal in place.

Power On

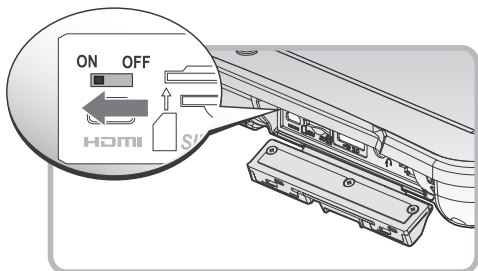


1. Open the I/O compartment cover.
2. Switch the DIP switch to the ON position.
3. Install the external battery cover over the battery connector.

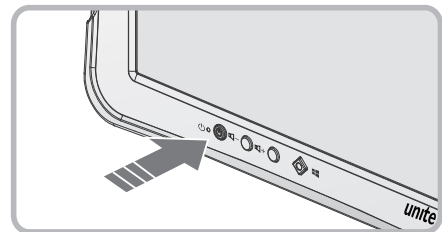


4. Press and hold the power button until the screen lights. The device runs through the start up sequence and powers up.

Note: While installing windows 10 IoT, please skip the step when users are asked to enter product key.

MicroSD Card

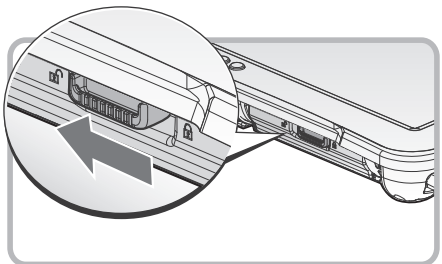


1. Unlock the latch.
2. Open the I/O compartment cover.

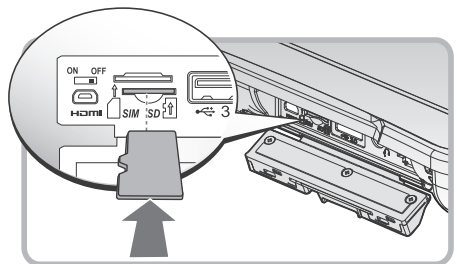


3. Take the microSD card from its packaging.
4. Insert the microSD card into the slot, making sure the beveled edge is aligned in the slot.
5. Press in until an audible click sounds.

SIM Card

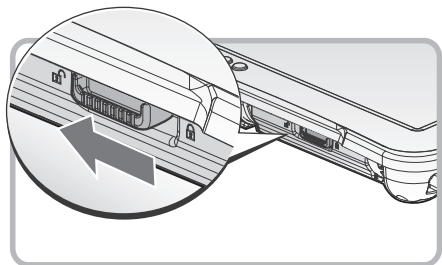

1. Unlock the latch.
2. Open the I/O compartment cover.

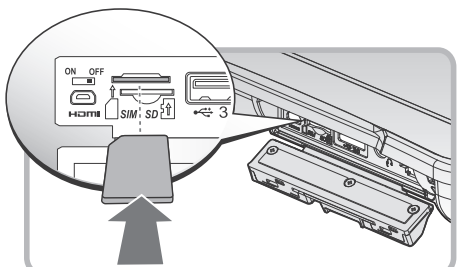

3. Take the SIM card from its packaging.
4. Insert the SIM card into the slot, making sure the beveled edge is aligned in the slot.
5. Press in until an audible click sounds.

* : Optional accessory

For more detailed tablet computer setting, please go to www.ute.com to download the user manual and the configuration manager utility.

Version 1.0