

Introduction


These instructions describe how to replace the cable on the DS4800 Series Imager. For more information on the DS4800, refer to the *DS4800 Series Imager Product Reference Guide*, available at <http://www.zebra.com/support>




CAUTION Use care when replacing the cable and apply standard ESD handling procedures such as using grounding wrist straps and handling in a properly grounded work area.

Removing the Cable


1. Remove the two 2.5x12 screws on the bottom of the imager using a T8 Torx head screw driver.

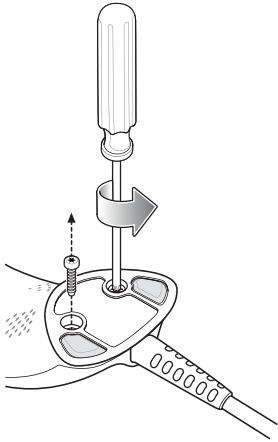


2. Slide a flat-head screwdriver or similar tool down the sides of the bezel, starting at the rear of the imager, to disengage the snaps and remove.

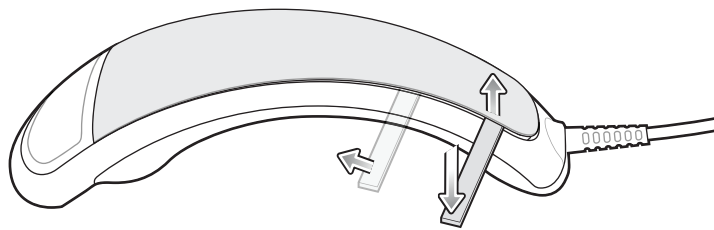

3. Remove the two M2.5x11 screws securing the top housing of the imager using Phillips head screw driver No. 1 or 0.

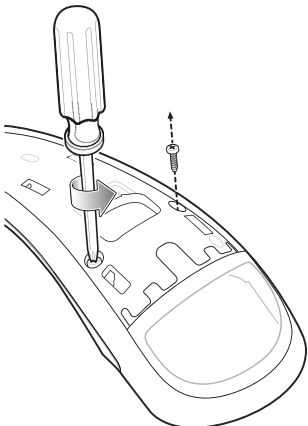

DS4800 SERIES IMAGER CABLE REPLACEMENT INSTRUCTIONS

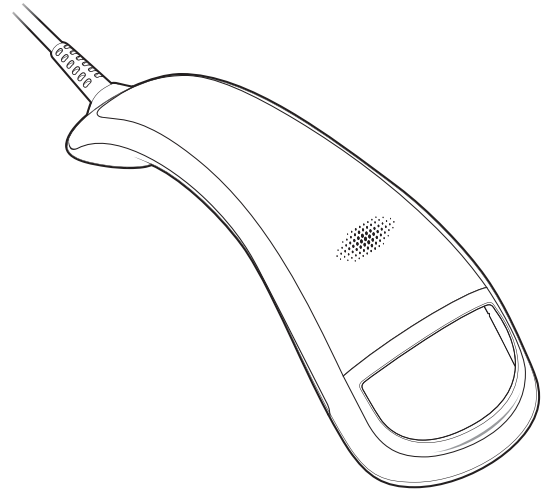

© 2015 Symbol Technologies, Inc.

Zebra reserves the right to make changes to any product to improve reliability, function, or design.

Zebra does not assume any product liability arising out of, or in connection with, the application or use of any product, circuit, or application described herein.

No license is granted, either expressly or by implication, estoppel, or otherwise under any patent right or patent, covering or relating to any combination, system, apparatus, machine, material, method, or process in which Zebra products might be used. An implied license exists only for equipment, circuits, and subsystems contained in Zebra products.

Zebra and the Zebra head graphic are registered trademarks of ZIH Corp. The Symbol logo is a registered trademark of Symbol Technologies, Inc., a Zebra Technologies company.

Zebra Technologies Corporation
Lincolnshire, IL U.S.A.
<http://www.zebra.com>



Zebra Technologies Corporation
Lincolnshire, IL U.S.A.
<http://www.zebra.com>

Zebra and the Zebra head graphic are registered trademarks of ZIH Corp. The Symbol logo is a registered trademark of Symbol Technologies, Inc., a Zebra Technologies company.


© 2015 Symbol Technologies, Inc.




MN000905A02 Revision A — March 2015



- Turn the imager over and disengage the snaps at the center by lifting from the back end of the housing. A slight rotating motion can aid in the release.

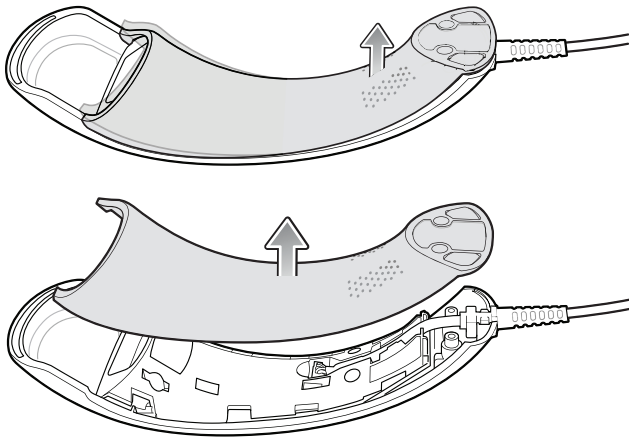


- Unplug the cable connector and free the cable from the housing by gently pulling upward on the strain relief.
- Keeping the unit horizontal, firmly grasp the cable as close to the connector as possible and pull vertically away from the unit.

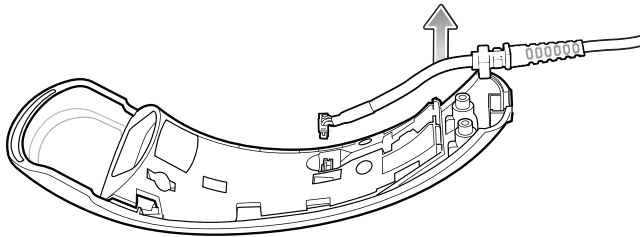


Installing the New Cable


- Press the new cable into the housing and connect the cable connector.

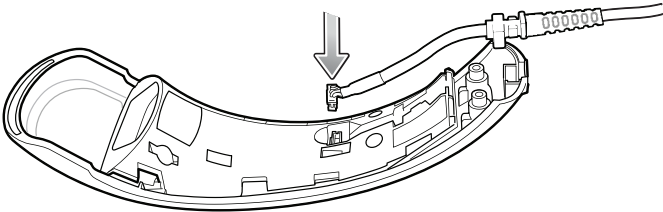


- Re-install the bottom housing on the underside of the imager, engaging the snaps.

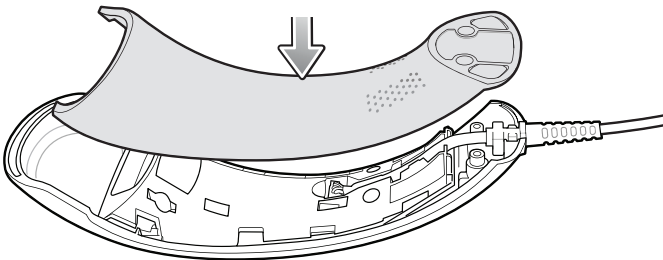

- Use a Phillips head screw driver No. 1 or 0 to secure the housing of the imager with the two M2.5x11 screws.



- Re-install the bezel on the top side of the imager, engaging the snaps.
- Secure the two 2.5x12 screws on the bottom of the imager using a T8 Torx head screw driver.

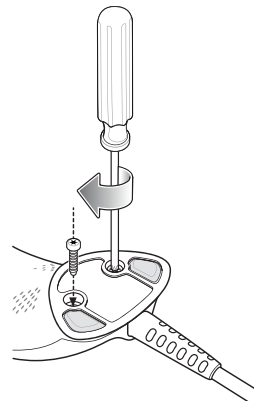

Service Information

If you have a problem using the equipment, contact your facility's technical or systems support. If there is a problem with the equipment, they will contact Zebra Support at: <http://www.zebra.com/support>.

For the latest version of this guide go to: <http://www.zebra.com/support>.

Warranty

For the complete Zebra hardware product warranty statement, go to: <http://www.zebra.com/warranty>

For Australia Only

For Australia Only. This warranty is given by Zebra Technologies Asia Pacific Pte. Ltd., 71 Robinson Road, #05-02/03, Singapore 068895, Singapore. Our goods come with guarantees that cannot be excluded under the Australia Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. Zebra Technologies Corporation Australia's limited warranty above is in addition to any rights and remedies you may have under the Australian Consumer Law. If you have any queries, please call Zebra Technologies Corporation at +65 6858 0722. You may also visit our website: <http://www.zebra.com> for the most updated warranty terms.